



Python - GOS40

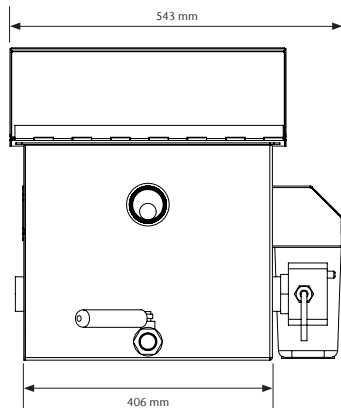

Specification Clause


Shall be a Python Model: GOS40 grease removal device / immiscible liquid separator which continuously operates under hydro static pressure with no moving parts. Is made of 2 mm, 304 stainless steel and comes standard with an immersion heater. It has a capacity of 37.9 Litres per minute and meets the industry codes and standards including UL, IPC, UPC, IRC, NPC, ASME A112.14.3, ASME A1123.14.4, PDI G101, and CSA B481.1

Electrical Requirements


- 110 Volt, 1000 Watts, 9 Amps within 5' of unit

Required Clearances

- Headroom needed above strainer basket: 305mm
 - 51 mm inlet
 - 51 mm outlet
 - Access to front Oil Cassette
 - Access to hinged lid for Oil Valve
- The Python Outlet may discharge either indirectly (e.g., into a floor sink) or directly to a drain pipe.
ACO recommends checking local plumbing codes prior to installation.

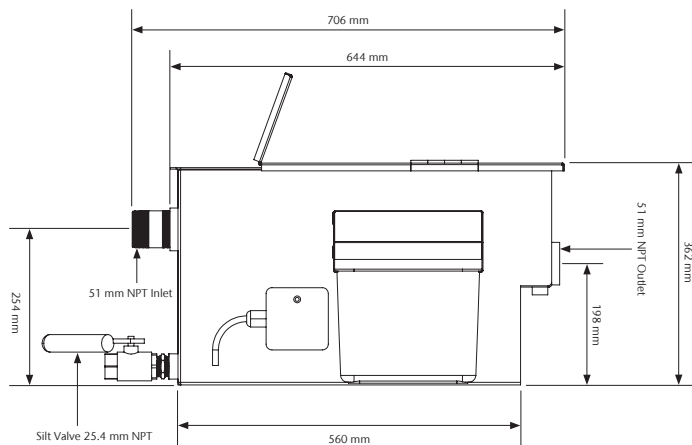

Strainer Basket

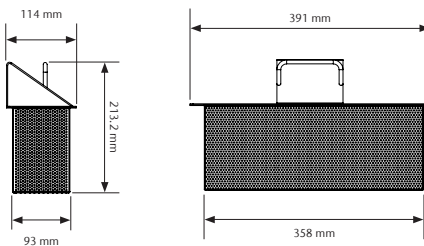

	Part No.	ACRD Separator	Weight kg
GOS40	139540	37.9 LPM	34.0

ACO Limited
New Zealand

Ph: 0800 448 080
www.aconz.co.nz
sales@aconz.co.nz

www.aconz.co.nz
www.askaco.nz/python

© April 2022 ACO Limited.
All reasonable care has been taken in compiling the information in this document. All recommendations and suggestions on the use of ACO products are made without guarantee since the conditions of use are beyond the control of the company. It is the customer's responsibility to ensure that each product is fit for its intended purpose and that the actual conditions are suitable. ACO Limited pursues a policy of continuous product development and reserves the right to amend specifications without notice.

ACO. we care for water



ACO Specification Information