

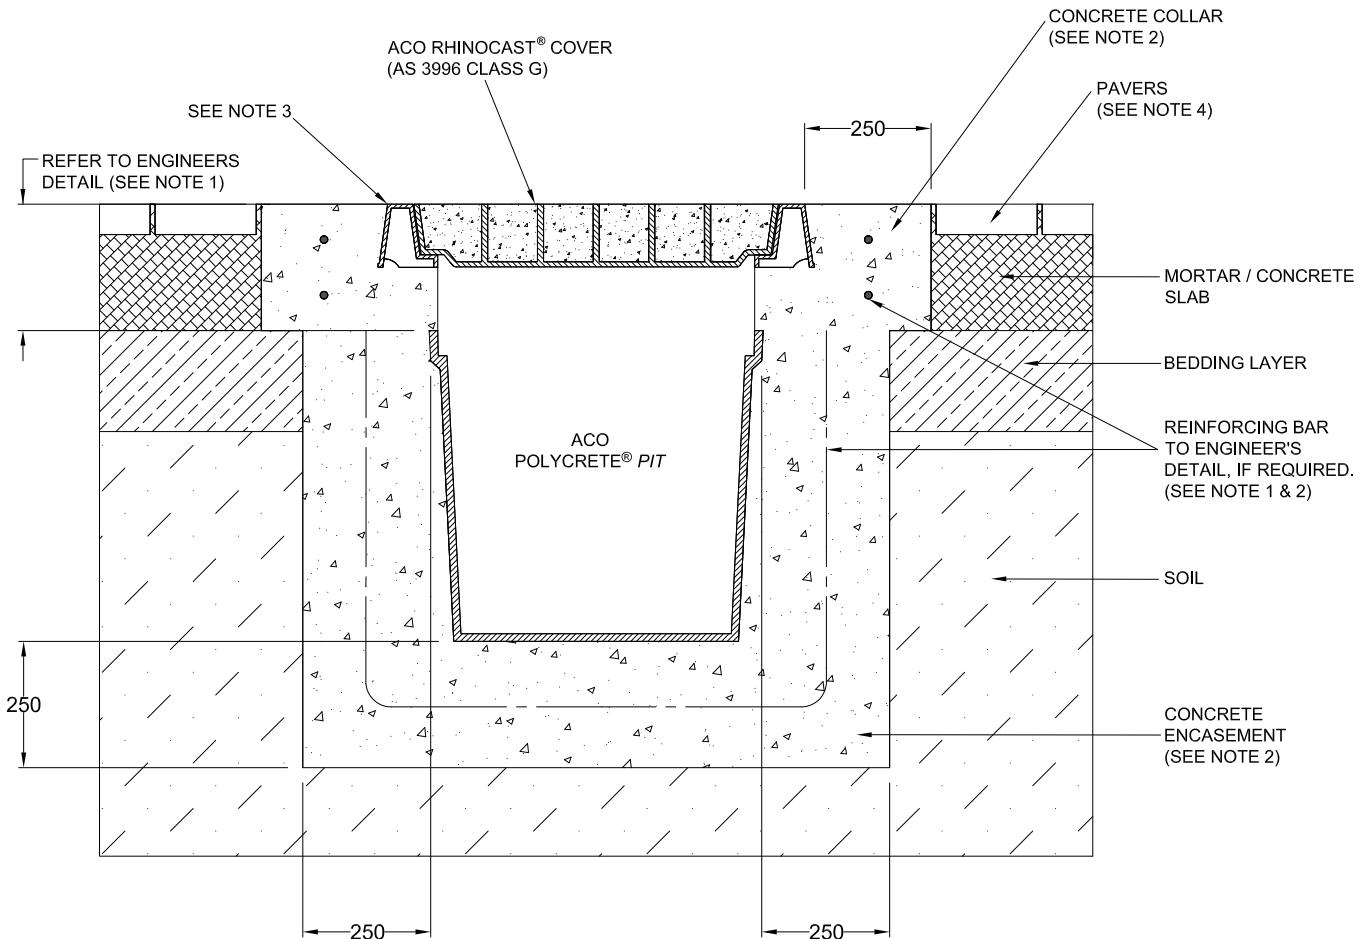
ACO CABLEMATE®

POLYCRETE® PIT
INSTALLATION DRAWINGDRWG# XCPR-GP-3
www.aconz.co.nz

With Rhinocast® Recessed Cover



Pavers: For 30000kg Nominal Wheel Load

Start Your
Specification
Here

NOTES:

1. Specific site conditions may require an increase in these dimensions or reinforcement. It is the customer's responsibility to ensure the installation drawing is detailed for the application and the pit structure is protected from undue stress. *Engineering advice may be required.*
2. A minimum concrete strength of 25MPa is recommended. The concrete should be vibrated to eliminate air pockets.
3. The finished level of the concrete collar must be flush with the top of the frame.
4. The paver course adjacent to the concrete collar must be flush with the collar and must be fully bonded to the mortar/concrete slab.
5. Refer to ACO's latest installation instructions for complete details.

ACO CABLEMATE®

POLYCRETE® PIT
SPECIFICATION CLAUSEDRWG# XCPR-GP-3
www.aconz.co.nz

With Rhinocast® Recessed Cover

ACO Limited
35 Te Tiki Road
Mangere, Auckland 2022
Tel: 0800 448 080
Fax: +64 9255 5114
Email: info@aconz.co.nz

The cable enclosure(s) (for a nominal wheel load of 30000kg) with a *clear opening(s)* of shall be **Polycrete® Pit(s)** Type (s) and part no.(s) with **Rhinocast®** Recessed / Solid Top cover(s) and part no.(s)

All materials and components within the scope of the system shall be obtained from ACO and the work shall be carried out as specified in accordance with the manufacturer installation recommendations.