



This grate is part of ACO's Heelsafe® Anti-Slip range. For more information visit [www.heelsafe.com.au](http://www.heelsafe.com.au)

**Product Features**



Certified to AS 3996 Load Class D (210kN) (NATA endorsed load test reports available)



AS 3996 (Clause 3.3.6) compliant for surface openings in pedestrian areas ASME A112.6.3 (Section 7.12) compliant – American high heel standard



AS 4586: P3 – Slip resistance classification for Wet Pendulum Test AS 4586: R10/R10<sup>1</sup> – Slip resistance classification for Oil-Wet Inclining Platform Test




AS 1428.1 (Clause 4.4c) compliant for wheelchair and walking cane safety



AS 3996 (Clause 3.3.7) compliant for bicycle tyre penetration resistance

- Recesses in grate fit around 'anti-shunt' lugs on the edge rail to prevent longitudinal movement
- **PowerLok** boltless locking system
- Suitable for use with TD300 channels
- Manufactured from ductile iron to AS 1831 Grade 500-7

<sup>1</sup> Test direction (perpendicular/parallel) relative to the grate's length (NATA endorsed test reports available)

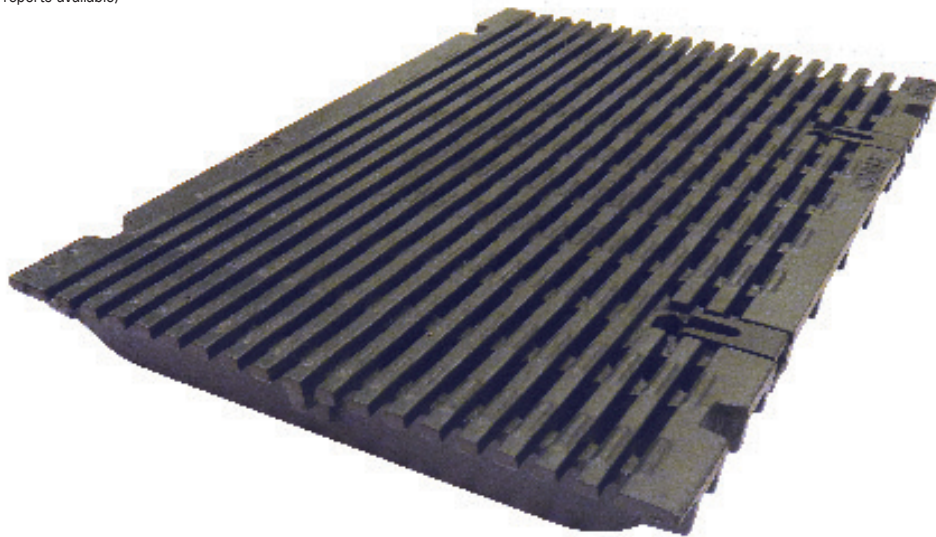

**Specifications**

The grate shall be ACO TD300 Iron Intercept Heelsafe® Anti-Slip grate with PowerLok boltless locking system as manufactured by ACO. This grate has an overall width of 337mm and overall length of 500mm. Slot widths measure at a maximum of 6.3mm.

**Materials & Design**

The grate shall be manufactured from ductile iron and have **minimum** properties and characteristics as follows:

- Recesses in grate fit around 'anti-shunt' lugs on the edge rail to prevent longitudinal movement
- Manufactured from ductile iron to AS 1831 Grade 500-7
- Certified to AS 3996 Load Class D (210kN)<sup>2</sup>
- AS 4586: P3 – Slip resistance classification for Wet Pendulum Test<sup>2</sup>
- AS 4586: R10/R10<sup>1</sup> – Slip resistance classification for Oil-Wet Inclining Platform Test<sup>2</sup>
- Meets AS 1428.1 (Clause 4.4c); AS 3996 (Clause 3.3.6 & 3.3.7); ASME A112.6.3 (Section 7.12)
- Intake area of 38,950mm<sup>2</sup> per half metre of grate


<sup>1</sup> Test direction (perpendicular/parallel) relative to the grate's length

<sup>2</sup> NATA endorsed test reports available

For the specification of the ACO TraffikDrain channel system selected, click: <http://www.acoinfrastructure.com.au/product-support/>

*ACO Specification Information*




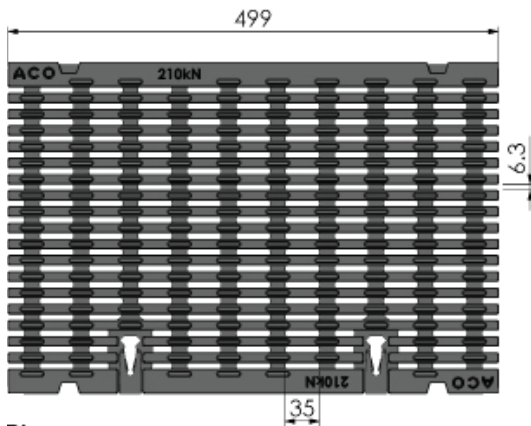

Plan




Side Elevation



End Elevation

Description	Part No.	Length (mm)	Width (mm)	Weight (kg)
<b>PowerLok grate</b>				
TD300 Iron Intercept Heelsafe® Anti-Slip	<b>142126</b>	500	337	14.8
Grate removal tool	<b>01318</b>	-	-	0.1
<b>PowerLok</b> safety clip	<b>10443</b>	-	-	-

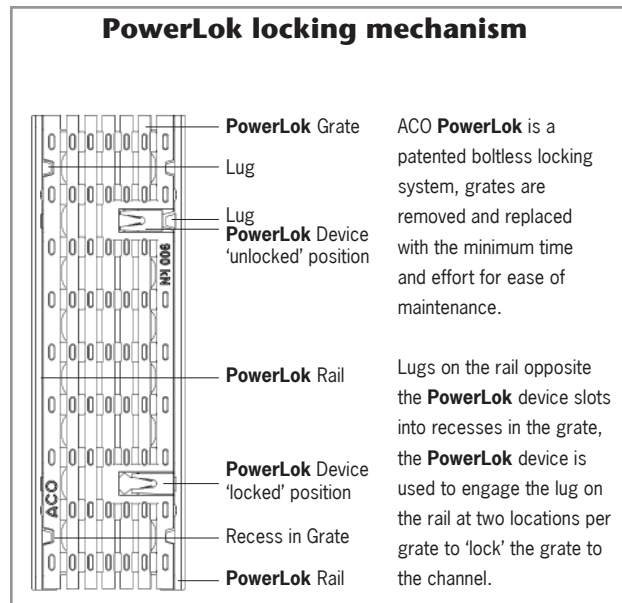

**ACO Pty Ltd**  
Australia  
Ph: 1300 765 226  
www.acoinfrastructure.com.au  
sales@acoaus.com.au

**ACO Limited**  
New Zealand  
Ph: 0800 448 080  
www.acoinfrastructure.co.nz  
sales@aconz.co.nz



© August 2022 ACO Limited. All reasonable care has been taken in compiling the information in this document. All recommendations and suggestions on the use of ACO products are made without guarantee since the conditions of use are beyond the control of the Company. It is the customer's responsibility to ensure that each product is fit for its intended purpose and that the actual conditions of use are suitable. ACO Limited reserves the right to change products and specifications without notice.