



Description

ACO KerbDrain QK200B

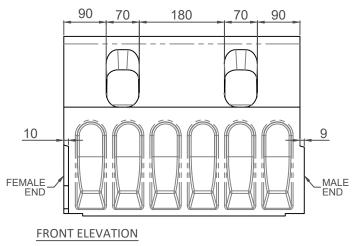

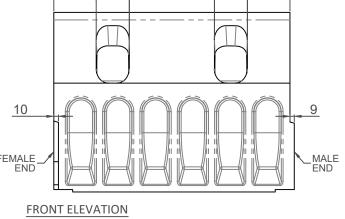

Invert Depth

(mm)*

205

Weight

(kg)

39.30

Pallet

(Units)

Chan Length
10
30

150

230

MALE END VIEW							
01	SLOPE						
Channel Length (m)	0'	0% 0.2		5%	0.5%		
	Q (l/s)	q (l/s/m)	Q (I/s)	q (l/s/m)	Q (l/s)	q (l/s/m)	
10	21.55	2.16	25.00	2.50	27.70	2.77	
30	19.62	0.65	27.30	0.91	32.31	1.08	
50	18.35	0.37	28.35	0.57	34.75	0.70	
70	17.22	0.25	29.05	0.42	36.19	0.52	
100	16.00	0.16	29.70	0.30	37.60	0.38	

- Q (l/s) is the maximum total flow that the channel can carry
- q (l/s/m) is the maximum possible lateral inflow

200 (c/o)

SPECIFICATION SHEET

Drawn:	Danilo V.	Revision: 00	
Verified:	George S.	Date: May/21	

The KerbDrain shall be ACO KerbDrain[®] Type QK200B as manufactured by ACO Pty Ltd. or equal approved. The KerbDrain shall be installed in accordance with the manufacturer's installation instructions and recommendations.

Overall Length

(mm)

500

Overall Width

(mm)

255

Overall Depth Internal Width

(mm)

200

(mm)

380

Materials/Properties

Load

Class

D240

Type

QK200B

The ACO KerbDrain[®] is manufactured from Polymer Concrete with minimum properties as follows: Compressive = 96 MPa Flexural strength: 27 MPa Water absorption 0.07% Frost proof Salt proof Dilute acid and alkali resistant

The nominal clear opening shall be 200mm with overall width of 255mm. Modular units shall be manufactured with neutral depth system and 2 front inlets. Each unit will feature a male to female interconnecting end profile. A sealant groove provides a recess to allow a bead of sealant to be inserted at joints, if required. Units shall have cast in anchoring features on the outside wall to ensure maximum mechanical bond to the surrounding bedding material and pavement surface.

Brand:

Part

Number

142291

ACO KERBDRAIN®

Product:

ACO KERBDRAIN®

QK200B



ACO Limited 35 Te Tiki Road Mangere Auckland 2022 Tel: 0800 448 080 Fax: +64 9255 5114 Email: info@aconz.co.nz