


Type 45 polymer concrete cable pit


Cable pit

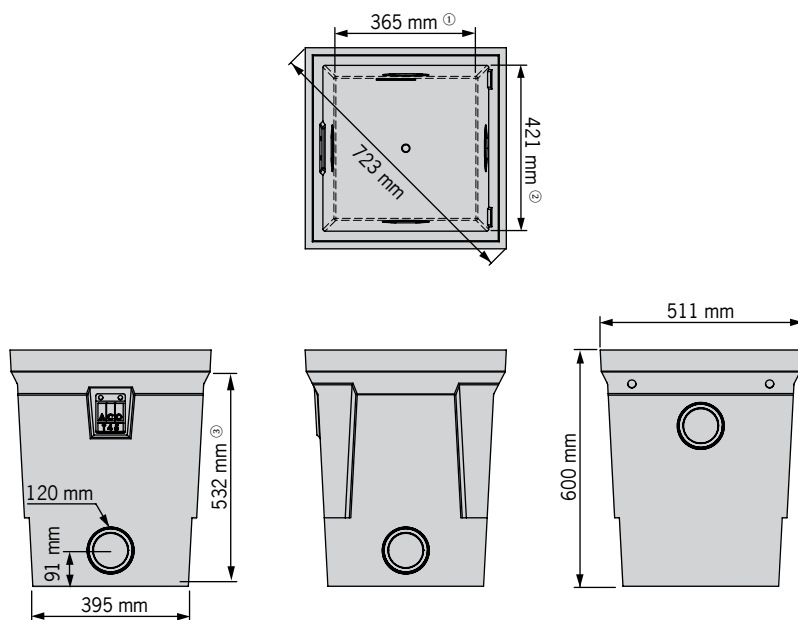

Key

- ① Clear working dimension at pit base
- ② Clear working dimension at pit opening
- ③ Clear working dimension beneath rebate

Optional riser - each riser adds up to 300mm height

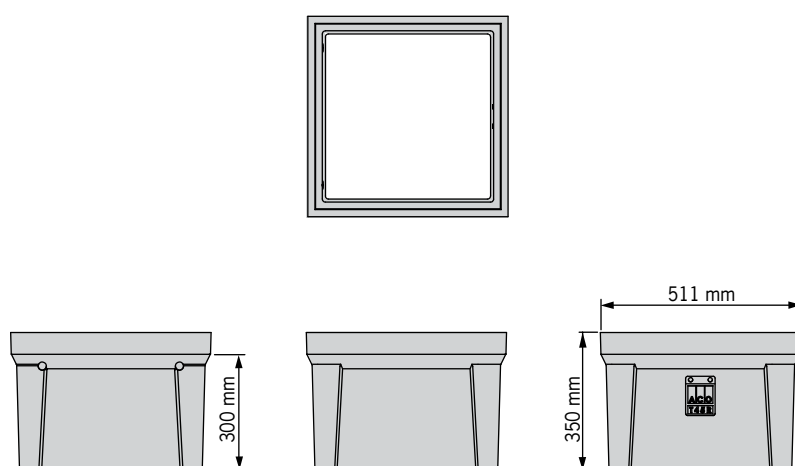

ACO CABLEMATE

Type 45 polymer concrete cable pit

Cable pit and riser

Description	Part No	Depth mm	Weight kg
Type 45 polymer concrete pit	75362	600	47.0
Accessories			
Type 45 polymer concrete riser (adds 300mm to pit depth)	75389	350	27.3

Compatible lids and access covers

Description	Part No	Weight kg cover ² total
Polymer concrete lid (AS 3996 CI A) - Blank ^{1 3}	75400	15 15
Polymer concrete lid (AS 3996 CI A) - Communications ^{1 3}	75414	15 15
Polymer concrete lid (AS 3996 CI A) - Electricity ^{1 3}	75427	15 15
Steel lid (AS 3996 CI B) ^{1 4}	74521	11 11
Steel lid (AS 3996 CI C) ^{1 4}	custom	- -
Steel PowerLok lid (AS 3996 CI B) ^{1 4}	74530	14 14
Steel PowerLok lid (AS 3996 CI C) ^{1 4}	custom	- -
Steel Urbanfil recessed cover (AS 3996 CI B) ¹	81520	11 16
Steel Pavermate recessed cover (AS 3996 CI B) ¹	81305	12 18
Ductile iron Rhinocast recessed cover (AS 3996 CI B) ¹	85014	28 40
Ductile iron Rhinocast solid top cover (AS 3996 CI B) ¹	85249	20 44
Ductile iron Rhinocast recessed cover (AS 3996 CI D) ¹	89013	42 83
Ductile iron Rhinocast solid top cover (AS 3996 CI D) ¹	89268	46 86
Ductile iron Rhinocast recessed cover (AS 3996 CI G) ¹	87016	86 138

1. Refer to ACO Cablemate literature for details

2. Lifting weight - kg

3. Lid dimension: 465 x 465 x 50 (mm)

4. Lid dimension: 470 x 470 x 48 (mm)

Specifications

General

The cable pit shall be ACO Cablemate Type 45 with lid/access cover* (see below) as manufactured by ACO Limited or equal approved.

Materials

The pit/riser bodies shall be manufactured from polyester polymer concrete with:

Electrical resistivity 1 x 10⁸ Ω/sq
Compressive strength: 96MPa
Flexural strength: 27MPa
Water absorption 0.07%
Frost proof
Salt proof
Dilute acid and alkali resistant
Surface burn characteristics of the material shall comply with UL 723

The nominal clear opening shall be 421mm x 421mm. Units shall be manufactured with a clear depth of 532mm.

Optional riser

Additional height can be added using one or two polymer concrete riser units - each riser adds up to 300mm height.

Lid/Access cover

The pit shall be covered with a polymer concrete lid*, steel / PowerLok lid*, Urbanfil/Pavermate access cover*, Rhinocast access cover* - see table for compatible options.

Installation

The cable pit shall be installed in accordance with the manufacturer's installation instructions and recommendations.

* delete as applicable

ACO Limited
New Zealand
Ph: 0800 448 080
www.aconz.co.nz
info@aconz.co.nz

Start Your
Specification
Here



SPEC INFO
ACO

© July 2017 ACO Limited. All reasonable care has been taken in compiling the information in this document. All recommendations and suggestions on the use of ACO products are made without guarantee since the conditions of use are beyond the control of the company. It is the customer's responsibility to ensure that each product is fit for its intended purpose and that the actual conditions are suitable. ACO Limited pursues a policy of continuous product development and reserves the right to amend specifications without notice.