


Type 9 polyethylene cable pit

Cable pit

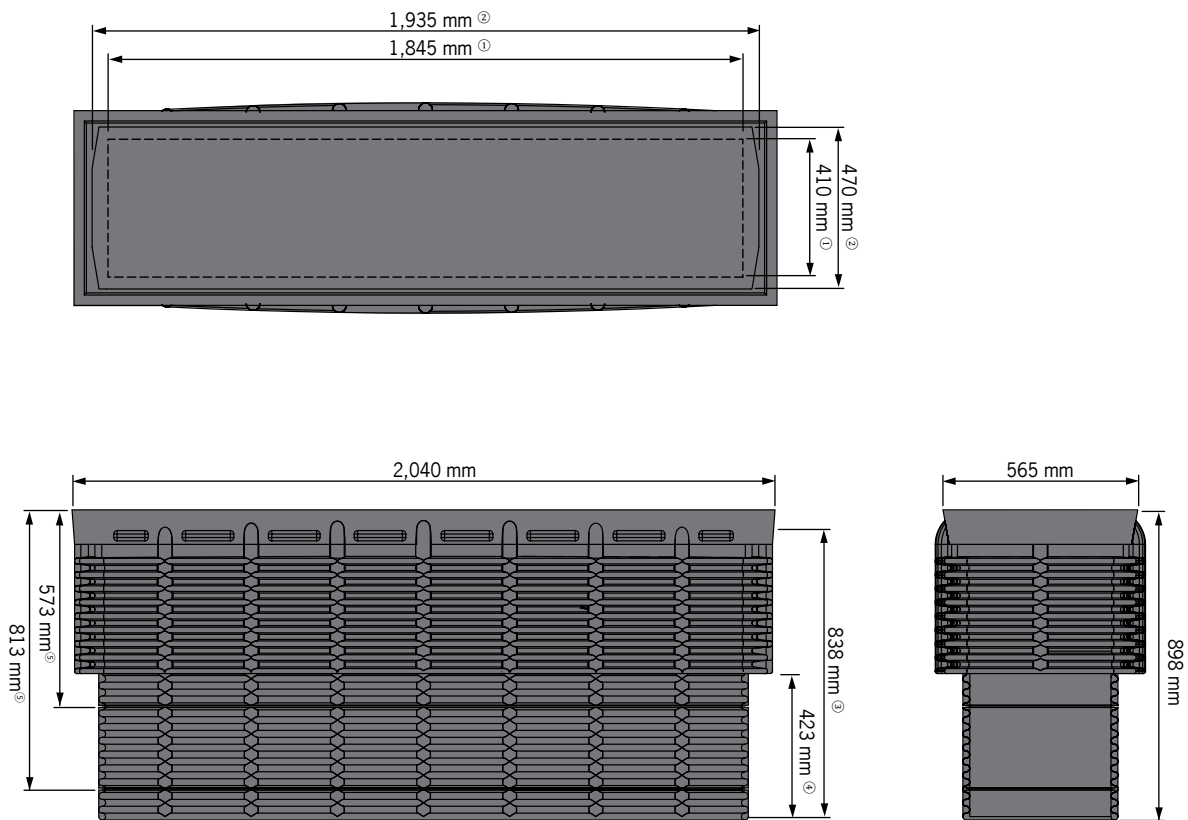

Key

- ① Clear working dimension at pit base
- ② Clear working dimension at pit opening
- ③ Clear working dimension beneath rebate
- ④ Clear working dimension beneath riser cut off point
- ⑤ Height above retrorib

ACO CABLEMATE

Type 9 polyethylene cable pit

Cable pit and riser

Description	Part No	Depth mm	Weight kg
Type 9 polyethylene pit	75099	898	60.0

Compatible lids and access covers

Description	Part No	Weight kg	
		cover ²	total
Cement concrete 3-part lid (AS 3996 Cl A) - Blank ^{1 3}	75235	38	118
Cement concrete 3-part lid (AS 3996 Cl A) - Communications ^{1 3}	75236	38	118
Cement concrete 3-part lid (AS 3996 Cl A) - Electricity ^{1 3}	75237	38	118
Steel 3-part lid (AS 3996 Cl B) ^{1 4}	71920	15	45
Steel 3-part lid (AS 3996 Cl C) ^{1 4}	custom	-	-
Steel PowerLok 3-part lid (AS 3996 Cl B) ^{1 4}	71930	20	58
Steel PowerLok 3-part lid (AS 3996 Cl C) ^{1 4}	custom	-	-
Steel Urbanfil 3-part recessed cover (AS 3996 Cl B) ¹	75109	13	56
Steel Pavermate 3-part recessed cover (AS 3996 Cl B) ¹	80951	15	58
Ductile iron Rhinocast 3-part recessed cover (AS 3996 Cl B) ¹	80952	30	132
Ductile iron Rhinocast 3-part solid top cover (AS 3996 Cl B) ¹	80953	28	129

1. Refer to ACO Cablemate literature for details

2. Lifting weight - kg

3. Lid dimension: 651 x 499 x 50 (mm)

4. Lid dimension: 655 x 500 x 48 (mm)

Specifications

General

The cable pit shall be ACO Cablemate Type 9 with lid/access cover* (see below) as manufactured by ACO Limited or equal approved.

Materials

The pit body shall be manufactured from polyethylene with:

Electrical resistivity $1 \times 10^{16} \Omega/\text{sq}$
 Flexural strength: 15MPa
 Water absorption 0.31%
 Frost proof
 Salt proof
 Dilute acid and alkali resistant
 Surface burn characteristics of the material shall comply with UL 723
 IP ratings up to IP4X (AS 60529) - enclosure protection against ingress

Polyethylene moulded pits feature a ribbed construction for strength and durability. The nominal clear opening shall be 1,935mm x 470mm. Units shall be manufactured with a clear depth of 838mm.

Lid/Access cover

The pit shall be covered with a cement concrete lid*, steel lid*, Urbanfil/Pavermate access cover*, Rhinocast access cover* - see table opposite for compatible options.

Installation

The cable pit shall be installed in accordance with the manufacturer's installation instructions and recommendations.

* delete as applicable

ACO Limited
 New Zealand
 Ph: 0800 448 080
 www.aconz.co.nz
 info@aconz.co.nz

Start Your
 Specification
 Here



© July 2017 ACO Limited. All reasonable care has been taken in compiling the information in this document. All recommendations and suggestions on the use of ACO products are made without guarantee since the conditions of use are beyond the control of the company. It is the customer's responsibility to ensure that each product is fit for its intended purpose and that the actual conditions are suitable. ACO Limited pursues a policy of continuous product development and reserves the right to amend specifications without notice.

SPEC INFO
 ACO