

channel with Q-Flow galvanised steel slot

Two metre channel slot dimension 283mm slot dimension 2000mm









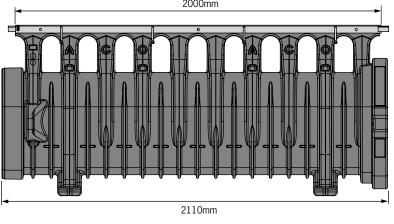


End cap




Outlet pit connectors




26mm





635mm





740mm






Qmax - 365 channel with Q-Flow galvanised steel slot





| Description | Part | Invert | Wgt |
|--|-------|--------|------|
| | No | mm | kg |
| Qmax 365 channel with Q-Flow galvanised steel slot - 2m | 32822 | 800 | 35.6 |
| Accessories | | | |
| Qmax 365 end cap (Fits male or female end of uncut channels - 0.012m | 32825 | - | 3.5 |
| Qmax 365 end cap (Easy push fit cap for cut channel ends - 0.06m | 32886 | - | 2.4 |
| Qmax 365 to Qmax 465 step connector - 0.045m | 32882 | - | 2.5 |
| Qmax 365 pit connector assembly (pair) - 0.8m | 32826 | - | 11.8 |

Typical Qmax 365 connection to pit

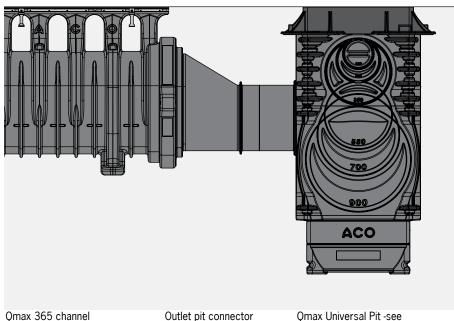

Qmax 365 to 465 Step connector





appropriate Spec Info

Specifications

General

The surface drainage system shall be ACO Qmax 365 with galvanised steel Q-Flow top as manufactured by ACO Limited or equal approved.

Materials

The trench system bodies shall be manufactured from medium density polyethylene with:

Compressive strength: 58,250 kN/m² Flexural strength: 15,350 kN/m² Water absorption 0.31%

The nominal clear opening shall be 365mm with unit overall width of 635mm. Units shall be manufactured with a neutral invert of 800mm. Each unit will feature a full radius in the channel bottom and a male to female interconnecting end profile, a rubber seal shall be fitted to the bell end of the channel unit. Units shall have molded anchoring features on the outside wall to ensure maximum mechanical bond to the surrounding bedding material and pavement surface.

Grate Unit

Grates shall be factory fitted to MDPE bodies to provide a monolithic unit. Water intake area per 2 metre unit will be 60,320mm².

Pit

See appropriate spec info for pit information.

Installation

The trench drain system shall be installed in accordance with the manufacturer's installation instructions and recommendations.

ACO Limited New Zealand

Ph: 0800 448 080 www.aconz.co.nz info@aconz.co.nz



(female)



