
Qmax - 600 channel with Q-Flow galvanised steel rail



July 2017


https://askaco.nz/aco-qmax/

Qmax - 600 channel with Q-Flow galvanised steel slot

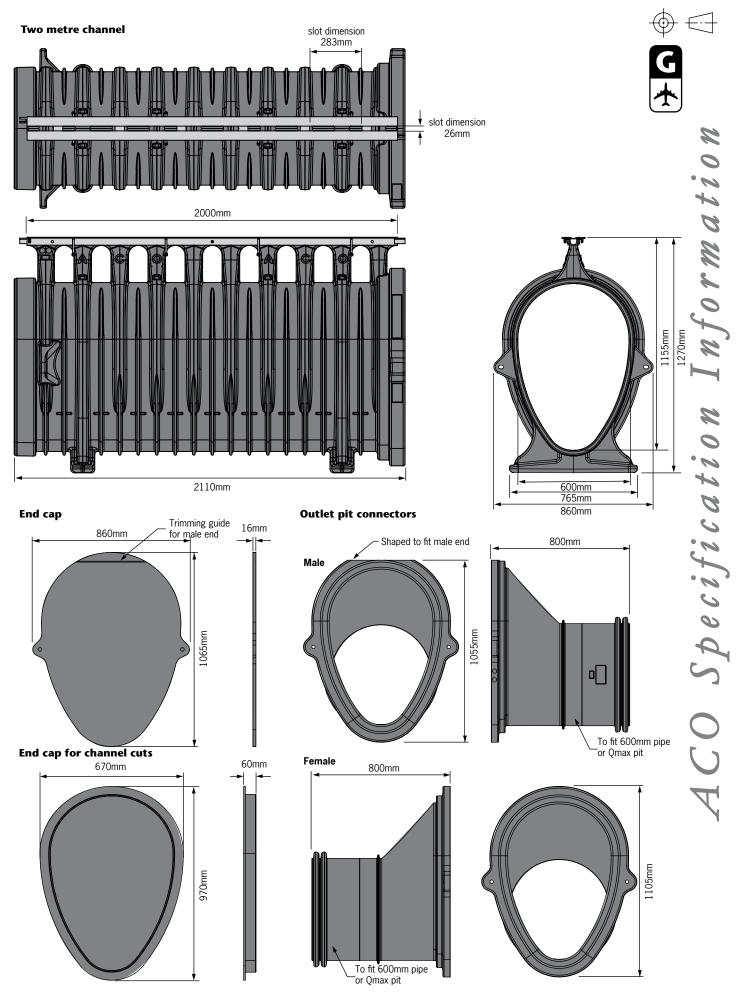

Description	Part	Invert	Wgt
	No	mm	kg
Qmax 600 channel with Q-Flow galvanised steel slot - 2m	32842	1155	57.2
Accessories			
Qmax 600 end cap (Fits male or female end of uncut channels) - 0.012m	32845	-	9.8
Qmax 600 end cap (Easy push fit cap for cut channel ends) - 0.06m	32888	-	4.9
Qmax pit connector assembly (pair) - 0.8m	32846	-	25.1

Typical Qmax 600 connection to pit

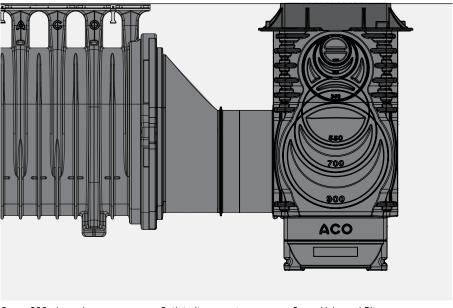

Qmax 600 channel

Outlet pit connector (female)

Qmax Universal Pit -see appropriate Spec Info

Specifications

General

The surface drainage system shall be ACO Qmax 600 with galvanised steel Q-Flow top as manufactured by ACO Limited or equal approved.

Materials

The trench system bodies shall be manufactured from medium density polyethylene with:

Compressive strength: 58,250 kN/m² Flexural strength: 15,350 kN/m² Water absorption 0.31%

The nominal clear opening shall be 600mm with unit overall width of 860mm. Units shall be manufactured with a neutral invert of 1155mm. Each unit will feature a full radius in the channel bottom and a male to female interconnecting end profile, a rubber seal shall be fitted to the bell end of the channel unit. Units shall have molded anchoring features on the outside wall to ensure maximum mechanical bond to the surrounding bedding material and pavement surface.

Grate Unit

Grates shall be factory fitted to MDPE bodies to provide a monolithic unit. Water intake area per 2 metre unit will be 60,320mm².

Pit

See appropriate spec info for pit information.

Installation

The trench drain system shall be installed in accordance with the manufacturer's installation instructions and recommendations.

ACO Limited New Zealand

Ph: 0800 448 080 www.aconz.co.nz info@aconz.co.nz





© July 2017 ACO Limited. All reasonable care has been taken in compiling the information in this document. All recommendations and suggestions on the use of ACO products are made without guarantee since the conditions of use are beyond the control of the company. It is the customer's responsibility to ensure that each product is fit for its intended purpose and that the actual conditions are suitable. ACO Limited pursues a policy of continuous product development and reserves the right to amend specifications without notice.