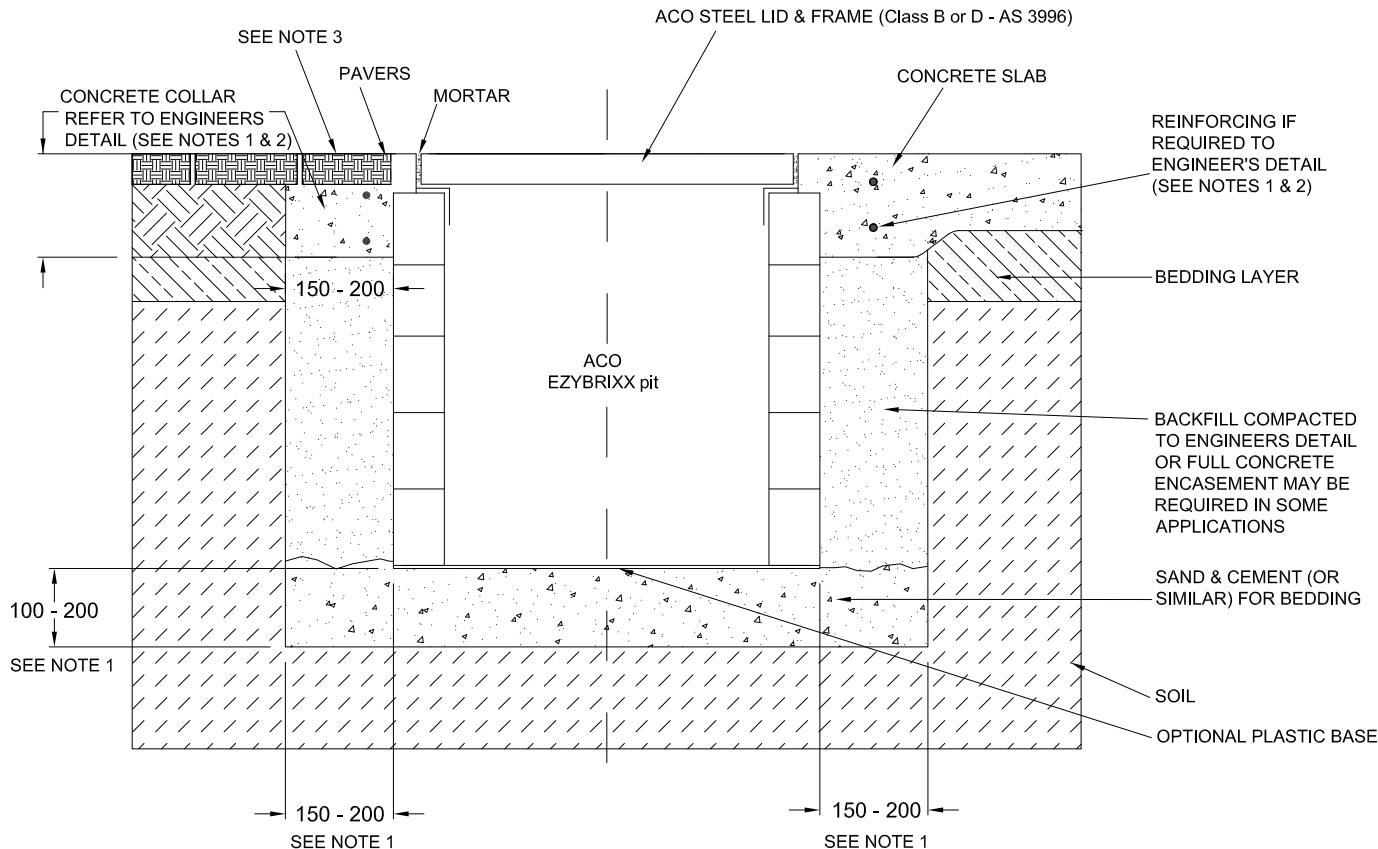


8000kg SMWL (Max)Start Your
Specification
Here**NOTES:**

1. Specific site conditions may require an increase in these dimensions or reinforcement. It is the customer's responsibility to ensure the correct lid is selected, encasement is designed for the application and the pit structure is protected from undue stress. *Engineering advice may be required.*
2. A minimum concrete strength of 25MPa is recommended for the collar.
3. The finished floor level must be flush with the top of the frame. Pavers (adjacent to the frame) must be restrained from movement.
4. Refer to ACO's Access Cover installation instructions for complete details. www.acoaccess.com.au/product-support
5. Class B and Class D lids are recommended for 2670kg and 8000kg Slow Moving Wheel Load (SMWL) respectively. Not recommended for roads.

The cable enclosure(s) with a *clear opening(s)* of shall be
ACO EzYBrixx pit(s) size (s) and/or *part no.(s)* with ACO Steel Lid & Frame assembly
part no.(s)

All materials and components within the scope of the system shall be obtained from ACO Pty Ltd and the work shall be carried out as specified in accordance with the manufacturer's installation recommendations.