

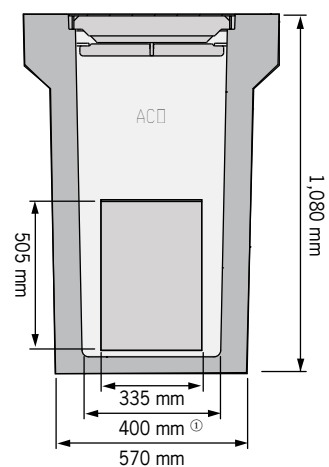
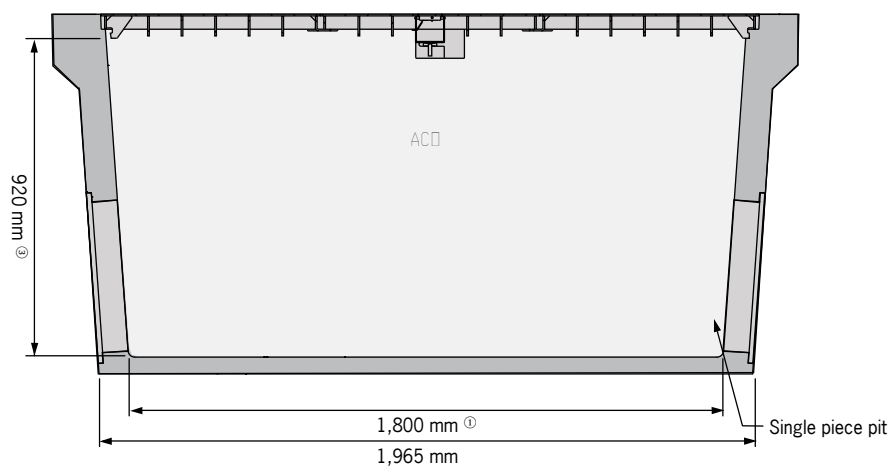


Cable pit - full body

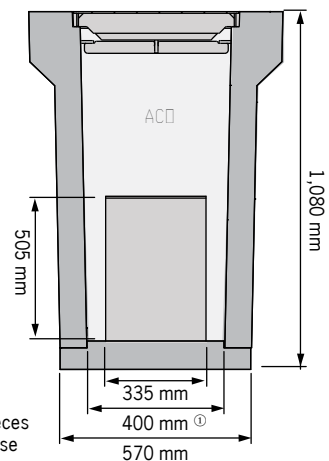

Cable pit - split body

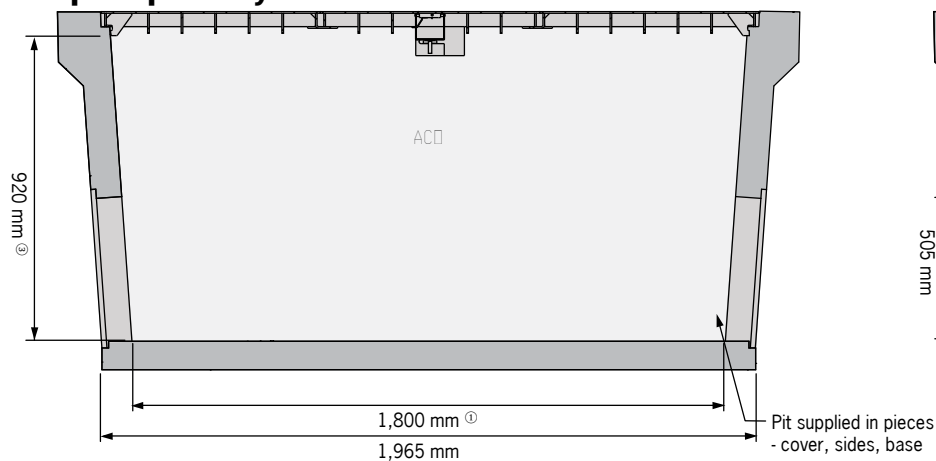

Key

- ① Clear working dimension at pit base
- ② Clear working dimension at pit opening
- ③ Clear working dimension beneath lid rebate

ACO CABLEMATE**J10P - ACO PITLOK® SCEC (SL1) - concrete pit & steel lid****Cable pit and riser**

| Description | Part No | Depth mm | Weight kg |
|--|---------------|----------|-----------|
| J10P - ACO PitLok® - concrete pit & steel lid - full body | 142249 | 1,080 | 1,180 |
| J10P - ACO PitLok® - concrete pit & steel lid - split body | 142250 | 1,080 | 1,168 |

Accessories & ancillary items

| Description | Part No | Weight kg |
|--|-------------------|-----------|
| Lid Lifting Tool | 142232 | 0.5 |
| ID Plates | On Enquiry | N/A |
| Route Marker Plates | On Enquiry | N/A |
| SCEC (SL3) Padlocks | On Enquiry | 0.5 |
| Swing Arm | On Enquiry | 1 |
| SCEC (SL1) approved precast concrete riser | On Enquiry | Variable |

Specifications*General*

The cable pit shall be ACO J10P PITLOK® SCEC (SL1) - concrete pit & steel lid - full* / split* body as supplied by ACO Pty Ltd. or equal approved.

The pit is fully tested and assessed on behalf of SCEC. SCEC have subsequently endorsed the lids and pits contingent on the use of SCEC (SL3) padlocks to secure the lids.

Materials

The pit body shall be manufactured from steel reinforced cement concrete with:

Compressive strength: 40MPa

The nominal clear opening shall be 1,905mm x 440mm. Units shall be manufactured with an internal depth of 920mm.

Lid

The pit shall be covered with a SCEC (SL1) approved tamper evident locking steel lid.

Installation

The cable pit shall be installed in accordance with the manufacturer's installation instructions and recommendations.

* delete as applicable

ACO Limited
New Zealand
 Ph: 0800 448 080
www.aconz.co.nz
sales@aconz.co.nz



© February 2018 ACO Limited. All reasonable care has been taken in compiling the information in this document. All recommendations and suggestions on the use of ACO products are made without guarantee since the conditions of use are beyond the control of the company. It is the customer's responsibility to ensure that each product is fit for its intended purpose and that the actual conditions are suitable. ACO Limited, pursues a policy of continuous product development and reserves the right to amend specifications without notice.