

Start Your
Specification
Here



SPECIFICATION CLAUSE TRAFFIKDRAIN TD200 - LOAD CLASS D

GENERAL

THE SURFACE DRAINAGE SYSTEM SHALL BE ACO'S TRAFFIKDRAIN TD200 POLYMER CONCRETE V-PROFILE CHANNEL SYSTEM WITH DUCTILE IRON EDGE RAILS AS MANUFACTURED BY ACO.

MATERIALS
TD200 CHANNELS SHALL BE MANUFACTURED FROM POLYESTER RESIN/POLYMER CONCRETE WITH AN INTEGRALLY CAST-IN DUCTILE IRON EDGE RAIL. PROPERTIES OF POLYMER CONCRETE WILL BE AS FOLLOWS WITH SUPPORTING DOCUMENTATION:

COMPRESSIVE STRENGTH: 98 MPa
FLEXURAL STRENGTH: 26 MPa
TENSILE STRENGTH: 14 MPa
WATER ABSORPTION: 0.07%

FROST PROOF: YES
COEFFICIENT OF EXPANSION/CONTRACTION: $2.02 \times 10^{-5}/^{\circ}\text{C}$
WATER VAPOUR TRANSMISSION: 0.0364 g/m^2
NON FLAMMABLE: YES
COEFFICIENT OF ROUGHNESS (MANNINGS): $n=0.011$
RESISTANT TO WEATHERING: YES
DILUTE ACID AND ALKALI RESISTANT: YES
SF SEALANT GROOVE: YES

CHANNELS


TD200 CHANNEL SHALL BE 200mm NOMINAL INTERNAL WIDTH WITH AN OVERALL WIDTH OF 260mm. CHANNEL INVERT SHALL HAVE A V-PORFILE TO ALLOW EFFICIENT DRAINAGE. TD200 SLOPED CHANNELS SHALL HAVE A BUILT-IN SLOPE OF 0.5%. ALL CHANNELS SHALL BE INTERLOCKING WITH A MALE/FEMALE JOINT.

GRATES

INSERT SPECIFICATION FOR THE SELECTED GRATE. REFER TO THE RELEVANT ACO SPECIFICATION INFORMATION SHEET. [CLICK HERE](#).

INSTALLATION

THE COMPLETE DRAINAGE SYSTEM SHALL BE BY ACO AND TO BE INSTALLED FOR ITS INTENDED PURPOSE. ANY DEVIATION OR PARTIAL USE OF THE SPECIFIED SYSTEM AND/OR IMPROPER INSTALLATION WILL VOID ALL WARRANTIES PROVIDED BY ACO.

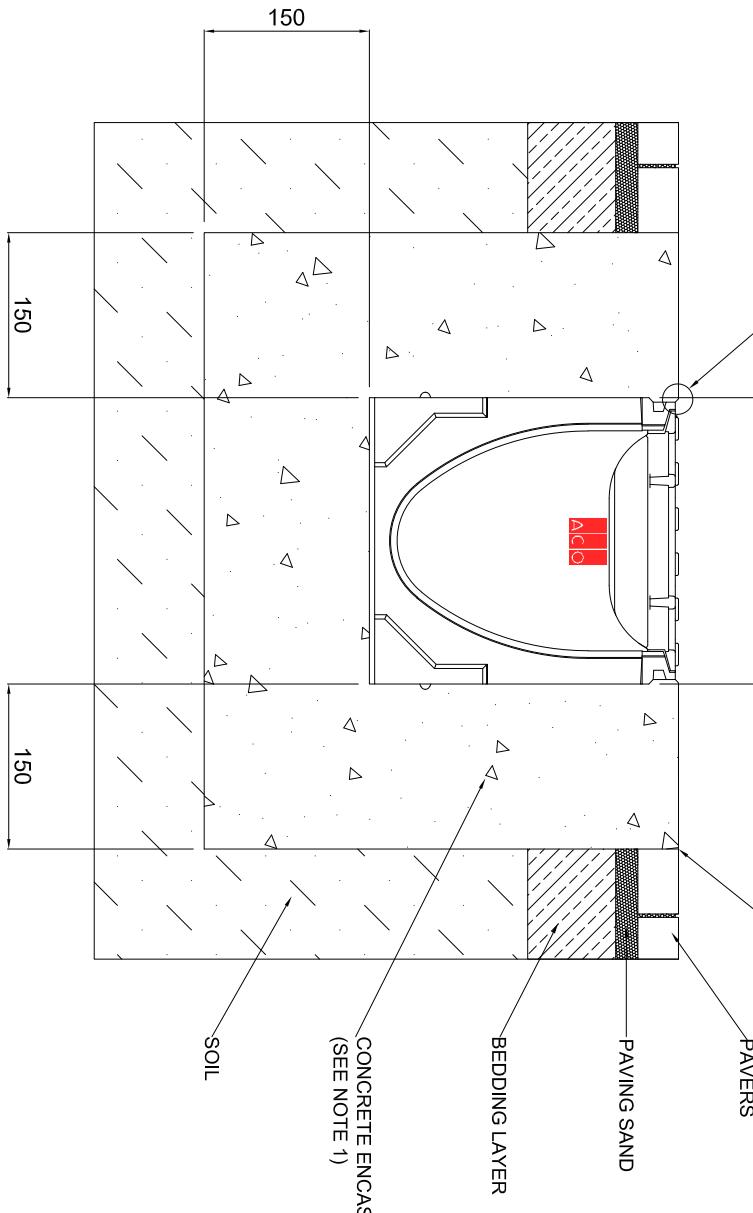


NOTES:

1. Specific site conditions may require an increase in the concrete encasement dimensions and/or reinforcement. It is the customer's responsibility to ensure the concrete encasement is designed for the application. A minimum concrete strength of 25MPa is recommended. The concrete should be vibrated to eliminate air pockets. Engineering advice may be required.
2. The finished level of the concrete encasement must be approximately 3mm above the top of the channel edge.
3. The pavers must be installed flush with the top of the concrete encasement.
4. For further details, refer to ACO's design & site Installation files at www.acodrain.com.au/resources.html

XIT2-DP2

TD200 - TRAFFIKDRAIN - LOAD CLASS: D FOR PAVERS

DATE: 02/14



INSTALLATION DRAWING - ACO DRAIN

ACO Polycrete Pty Ltd
Australia
Ph: 1300 765 226
www.acodrain.com.au

ACO Limited
New Zealand
Ph: 0800 448 080
www.acodrain.co.nz